



SOFFITTO

P A N E L S

HIGH QUALITY
INTERIOR PANELS
FOR WALL & CEILING

inspired by the *Infinite Sky*

VERTO




SVP 402

STATUARIO



SVP 101

ARCTIC WHITE

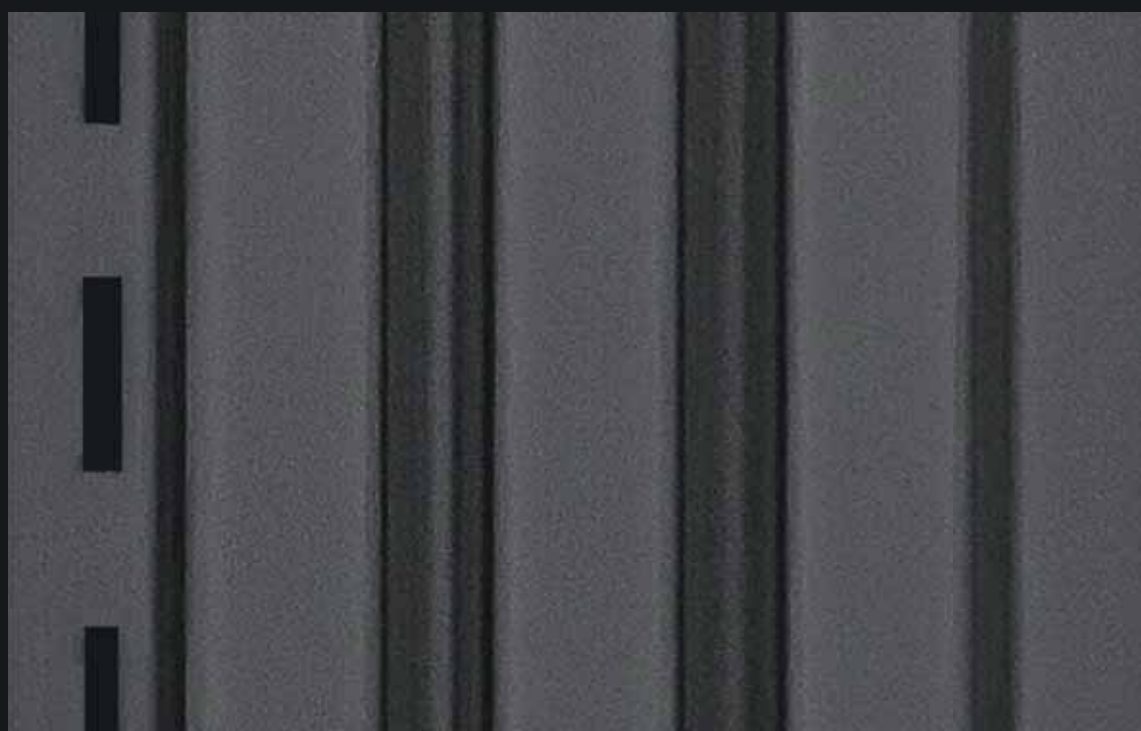


SVP 104

CHARCOAL GREY




SVP 103

SMOKE GREY

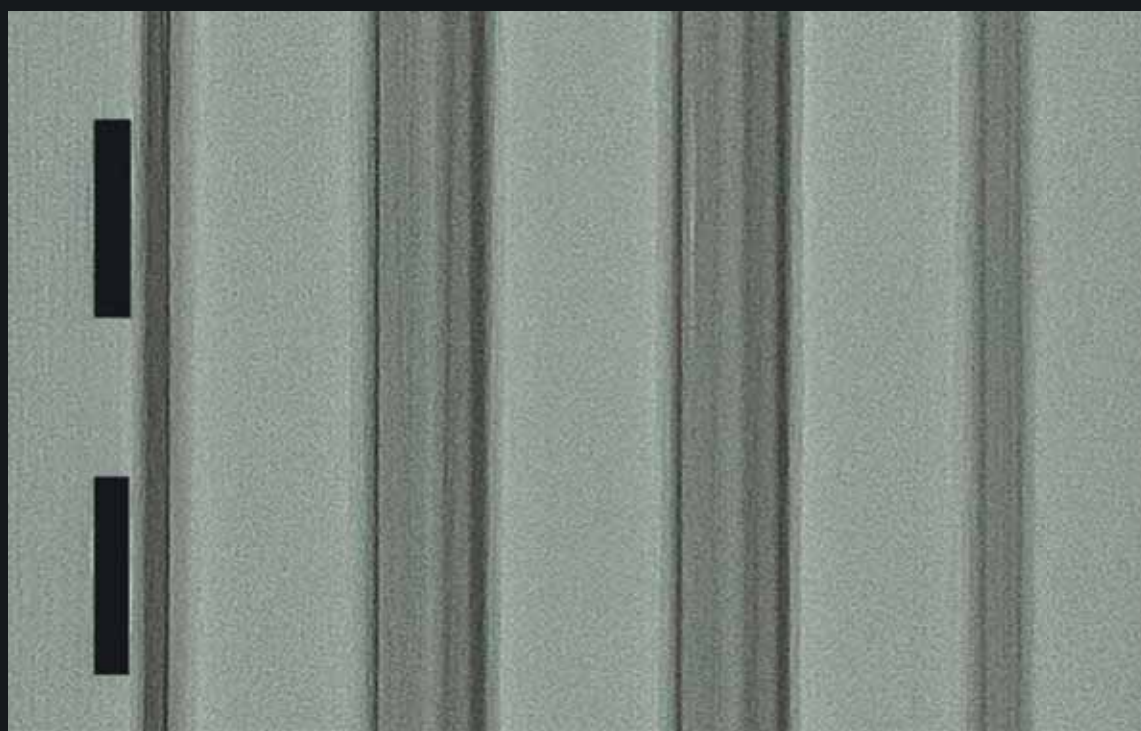

SVP 105

OLIVE GREEN

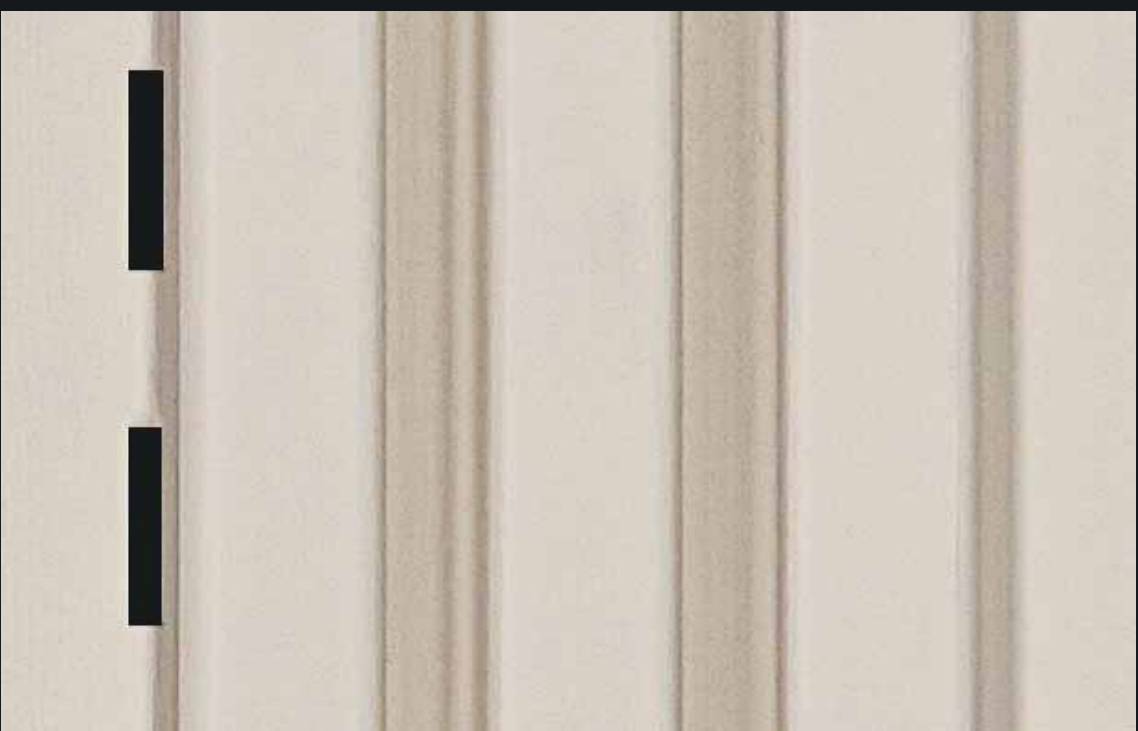

SVP 102

COSMIC LATTE

VERTO



SVP 601

COLORADO PINE



SVP 603

RUSTIC WOOD



SVP 605

ROVERE OAK



SVP 604

AMERICAN WALNUT



SVP 607

GOLDEN OAK




SVP 606

NATURAL TEAK



SVP 602

GREY OAK

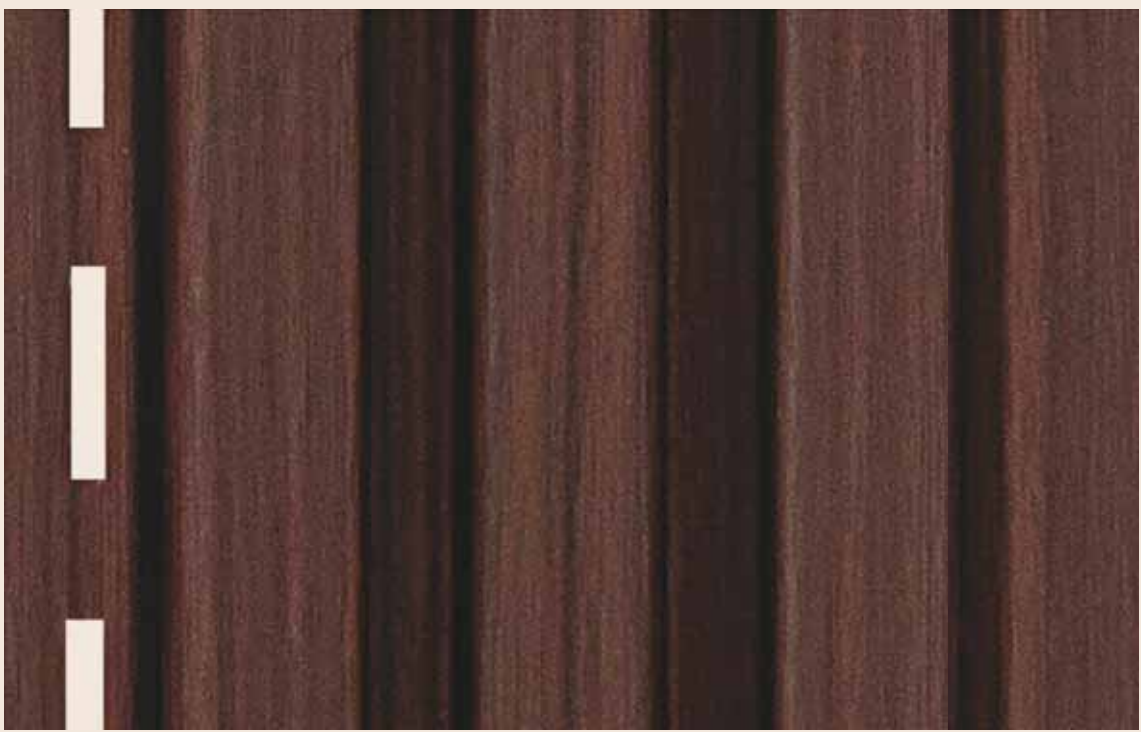

SVP 609

CHERRY RED



SVP 106

CARBON BLACK



SVP 608

OCRE OAK

GROOVEX



SGP 601

COLORADO PINE



SGP 605

ROVERE OAK



SGP 607

GOLDEN OAK



SGP 603

RUSTIC WOOD



SGP 604

AMERICAN WALNUT

GROOVEX



SGP 402

STATUARIO



SGP 602

GREY OAK



SGP 609

CHERRY RED



SGP 608

OCRE OAK



SGP 606

NATURAL TEAK

SOFFLINE



SSP 604

AMERICAN WALNUT



SSP 606

NATURAL TEAK



SSP 601

COLORADO PINE



SSP 605

ROVERE OAK



SSP 602

GREY OAK

SOFFLINE



SSP 101

ARCTIC WHITE



SSP 104

CHARCOAL GREY



SSP 607

GOLDEN OAK



SSP 608

OCRE OAK



SSP 603

RUSTIC WOOD

TECHNICAL SPECIFICATIONS

RELAVANT CODES AND REGULATIONS COMPLIANCE :
Colour : Uniformity is Spectrophotometrically Controlled.
Lock : Optically Measured and Controlled.

PRODUCT TEST DATA :


TESTS	RESULTS
Impact Resistance	No deformation observed. (Tested at 50 LBS)
Tensile Strength, MPa:	> 37.0
Tensile Modulus, MPa:	> 2000
Surface Distortion	None at 120F
Length:	Within 1/4" of specification
Lock Control:	Complies
Colour Change:	<2 grayscales [16hrs under 1200W/m2 UV radiation at 50 degrees}
Squareness	<1/8" of square

* **Disclaimer :** The color of samples may differ from the actual product.
Please place your order only after reviewing the physical sample.

NO PLY REQUIRED Can be directly screwed on the wall*

GROOVEX

280mm (Width) X 3060mm (Length)

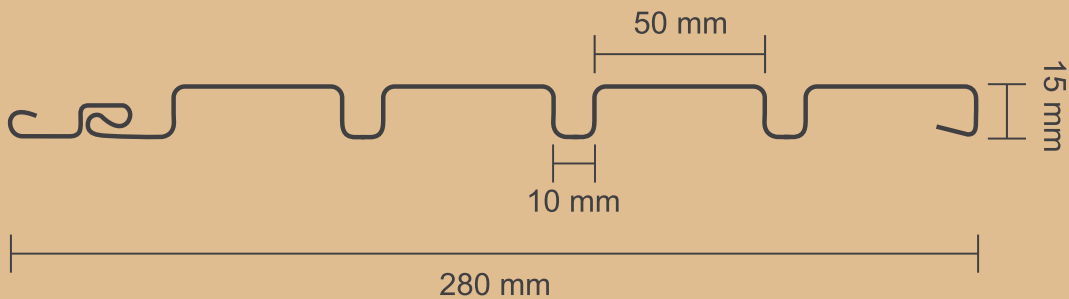


Length can be customized as per order*

* Terms & Conditions Apply

SOFFLINE

345mm (Width) X 3060mm (Length)

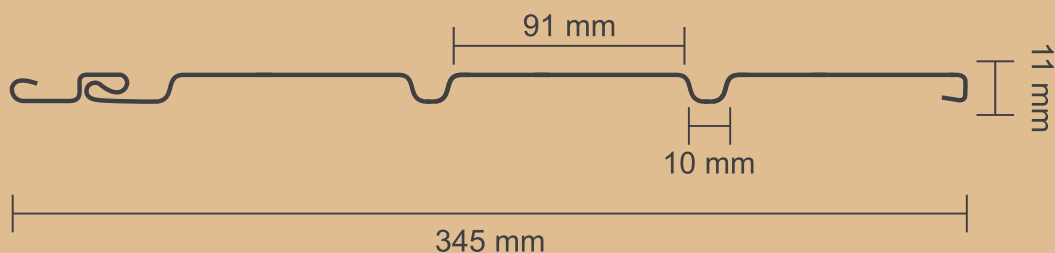


Length can be customized as per order*

* Terms & Conditions Apply

VERTO

145mm (Width) X 3060mm (Length)

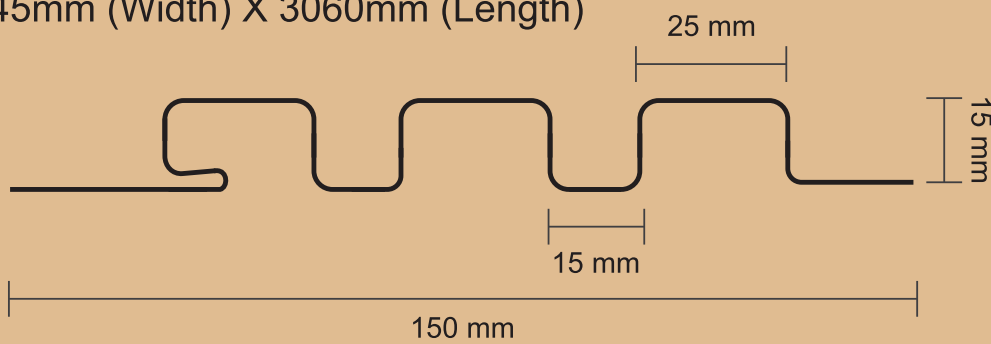


Length can be customized as per order*


* Terms & Conditions Apply

TRIMS


1 J TRIM (L)




2 J TRIM (S)

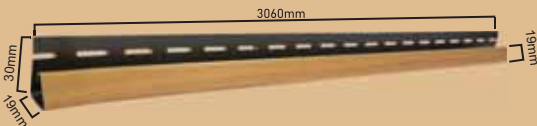

3 T TRIM



4 INSIDE CORNER TRIM



FEATURES

- High-quality Specially formulated Polymer for superior durability
- Weather-resistant performance suitable for interior applications
- Water and moisture resistant to prevent swelling and warping
- Lightweight design for quick and hassle-free installation
- Termite, borer, and corrosion resistant for long-lasting protection
- Low-maintenance finish that requires minimal upkeep
- Smooth, seamless appearance for a clean and modern look
- Flame-retardant properties for enhanced safety
- Available in a variety of colours and woodgrain finishes

APPLICATIONS

Soffitto Panels are a versatile cladding solution widely used in residential, commercial, and institutional projects. Ideal for:

- Interior soffits and roof overhangs
- Balcony and terrace ceilings
- Porch and veranda ceilings
- Entrance canopies
- Covered walkways and corridors
- Commercial buildings and retail outlets
- Resorts, hotels, and hospitality spaces
- Parking area ceilings
- Interior ceiling and wall-cladding applications

Designed to deliver lasting performance with refined aesthetics, Soffitto Panels enhance both modern and traditional architectural spaces while offering excellent protection against weather, moisture, and pests.

BRAND CERTIFICATIONS



SKYDECOR LAMINATES PVT. LTD.

F-26, Sector-8, Noida - 201301 (U.P.) E-mail: info@skydecor.in Website: www.skydecor.in